



Tri-proof Fittings



OZ-06D



Basic Information

Product Name	Tri-Proof Light
Model	OZ-06D
Protection Level	Class II
Ingress Protection	IP 65
Usage	Intensive, Dusty, Rainy places

Physical Parameter

Lamp Base Material	Polycarbonate
Lamp Cover Material	Polycarbonate
Working Temperature	-20 ~ 40
Installation	Ceiling, Suspended
Fittings supplied without lamp	

Optical Parameter

Input Voltage	220-240 Volt
Lamp	Led - 9 w, 18 w, 22 w, 24 w, 28w
Installation	Single / Twin Lamp

Additional Features

Sensor	Optional
Emergency	Optional



Item Ref	Lamp Type	Length	Width	Height	A 1	A 2	Clips St. Steel
OZ-06D-601	T8 600mm	0655 mm	072 mm	86 mm	420	0530	6
OZ-06D-602	T8 600mm	0655 mm	115 mm	86 mm	420	1010	6
OZ-06D-1201	T8 1200mm	1265 mm	072 mm	86 mm	900	0530	10
OZ-06D-1202	T8 1200mm	1265 mm	115 mm	86 mm	900	1010	10
OZ-06D-1501	T8 1500mm	1565 mm	072 mm	86 mm	1000	0530	10
OZ-06D-1502	T8 1500mm	1565 mm	115 mm	86 mm	1000	1010	10

Product Information:

- Dust proof, Weather proof & Corrosion proof.
- Durable outer casing / Cover made of high impact Polycarbonate material.
- Indoor or outdoor installation in the garages, cellars , industrial complex, Parking lots
- Available with high quality lamp holder
- Reflector Plate: Aluminum / Steel
- High hardness, smooth surface, not easy to distort,
- Excellent heat dissipation and complete source of light control of light failure
- Cover: PC material, high transparency, no dazzling, impact resistance, corrosion resistance.



OZ-06P

Basic Information

Product Name	Water Proof
Model	OZ-06P
Protection Level	Class II
Ingress Protection	IP 65
Usage	Intensive, Dusty, Rain

Physical Parameter

Body Material	Polycarbonate
Working Temperature	-20 ~ 40
Installation	Ceiling, Suspended

Optical Parameter

Input Voltage	220-240V
Color Temperature	3000K, 4000K, 6000K
Life Span	50,000 hrs.

Additional Features

Sensor	No
Emergency	No
Through Wiring	Optional



Item Ref	Power	Source	Lumen	Light Efficiency	P.F	CRI	Product Size L*W*H
OZ-06P-0610	10 watt	SMD2835	900 lm	90 lm/w	> 0.9	> 80	700*50*35
OZ-06P-0618	18 watt	SMD2835	1600 lm	90 lm/w	> 0.9	> 80	700*50*35
OZ-06P-1218	18 watt	SMD2835	1600 lm	90 lm/w	> 0.9	> 80	1230*53*35
OZ-06P-1236	36 watt	SMD2835	3500 lm	97 lm/w	> 0.9	> 80	1230*53*35
OZ-06P-1524	24 watt	SMD2835	2160 lm	90 lm/w	> 0.9	> 80	1510*53*35
OZ-06P-1545	45 watt	SMD2835	4300 lm	96 lm/w	> 0.9	> 80	1510*53*35

- New Fashionable Extruded Type
- Instant wiring coupler optional
- Serial connection optional



OZ-06RH

130Lm/w

Basic Information

Product Name	Tri-Proof Light
Model	OZ-06RH
Protection Level	Class I , IK08
Ingress Protection	IP 65
Usage	Intensive, Dusty, Rain

Physical Parameter


Lamp Base Material	Polycarbonate
Lamp Cover Material	Polycarbonate
Working Temperature	-20 ~ 40
Installation	Ceiling, Suspended

Optical Parameter


Input Voltage	220-240 Volt
Color Temperature	3000K, 4000K, 6000K
Life Span	50,000 hrs.

Additional Features

Sensor	(S) - Optional
Emergency	(EM) - Optional
Dimmable	(D) - Optional



Item Ref	Power	Led Qty	Source	Lumen	Light Efficiency	P.F	CRI	Product Size
OZ-06RH-0612	12 watt	38	SMD2835	1560Lm	130 lm/w	> 0.5	> 80	590*86*66
OZ-06RH-0621	21 watt	66	SMD2835	2730Lm	130 lm/w	> 0.5	> 80	590*86*66
OZ-06RH-1224	24 watt	74	SMD2835	3120Lm	130 lm/w	> 0.9	> 80	1180*86*66
OZ-06RH-1240	40 watt	126	SMD2835	5200Lm	130 lm/w	> 0.9	> 80	1180*86*66
OZ-06RH-1533	33 watt	102	SMD2835	4290Lm	130 lm/w	> 0.9	> 80	1480*86*72
OZ-06RH-1555	55 watt	168	SMD2835	7150Lm	130 lm/w	> 0.9	> 80	1480*86*72

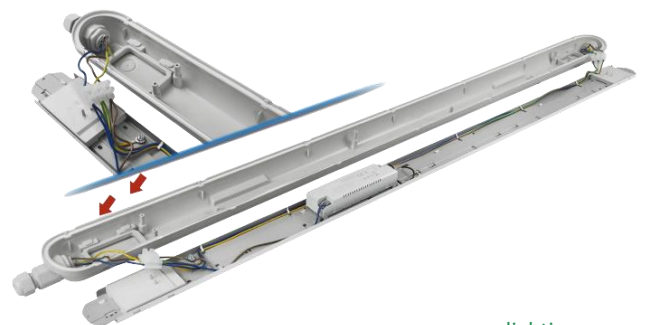

OZ-1B

115Lm/w



Basic Information

Product Name	Tri-Proof Light
Model	OZ-1B
Protection Level	Class II
Ingress Protection	IP 67
Usage	Intensive, Dusty, Rain

Physical Parameter


Body Material	Polycarbonate
Working Temperature	-20 ~ +50
Installation	Ceiling, Suspended
Beam Angle	120°

Optical Parameter

Input Voltage	100-277V, 50/60Hz
Color Temperature	3000K, 4000K, 6000K
Life Span	50,000 hrs.

Additional Features

Motion Sensor	Optional
Emergency Kit	Optional
IES test Report	Yes



Item Ref	Power	Source	Lumen	Light Efficiency	Power Factor	CRI	Product Size L*W*H
OZ-1B-0620	10 watt	SMD2835	2300 lm	115 lm/w	> 0.9	> 80	600*90*74
OZ-1B-0630	18 watt	SMD2835	3450 lm	115 lm/w	> 0.9	> 80	600*90*74
OZ-1B-0930	18 watt	SMD2835	3450 lm	115 lm/w	> 0.9	> 80	900*90*74
OZ-1B-0940	36 watt	SMD2835	4600 lm	115 lm/w	> 0.9	> 80	900*90*74
OZ-1B-1240	24 watt	SMD2835	4600 lm	115 lm/w	> 0.9	> 80	1200*90*74
OZ-1B-1260	45 watt	SMD2835	6900 lm	115 lm/w	> 0.9	> 80	1200*90*74
OZ-1B-1560	45 watt	SMD2835	6900 lm	115 lm/w	> 0.9	> 80	1500*90*74
OZ-1B-1580	45 watt	SMD2835	9200 lm	115 lm/w	> 0.9	> 80	1500*90*74

OZ-06EC



Basic Information

Product Name	Tri - Proof Fitting
Model	OZ-06EC
Protection Level	Class II
Ingress Protection	IP 65
Usage	Intensive, Dusty, Rainy places

Physical Parameter

Lamp Base Material	Polycarbonate
Lamp Cover Material	Polycarbonate
Working Temperature	-20 ~ 40
Installation	Ceiling, Suspended
Fittings supplied without lamp	

Optical Parameter

Input Voltage	Electronic choke 220-240 Volt
Lamp	Fluorescent – 18w, 36w, 58w
Installation	Single / Twin Lamp

Additional Features

Sensor	Optional
Emergency	Optional



Item Ref	Lamp Type	Length	Width	Height	A 1	A 2	Clips St. Steel
OZ-06EC-601	T8 600mm	0655 mm	072 mm	86 mm	420	0530	6
OZ-06EC-602	T8 600mm	0655 mm	115 mm	86 mm	420	1010	6
OZ-06EC-1201	T8 1200mm	1265 mm	072 mm	86 mm	900	0530	10
OZ-06EC-1202	T8 1200mm	1265 mm	115 mm	86 mm	900	1010	10
OZ-06EC-1501	T8 1500mm	1565 mm	072 mm	86 mm	1000	0530	10
OZ-06EC-1502	T8 1500mm	1565 mm	115 mm	86 mm	1000	1010	10

Product Information:

- Dust proof, Weather proof & Corrosion proof.
- Durable outer casing / Cover made of high impact Polycarbonate material.
- Indoor or outdoor installation in the garages, cellars , industrial complex, Parking lots
- Available with high quality lamp holder
- Reflector Plate: Aluminum / Steel
- High hardness, smooth surface, not easy to distort,
- Excellent heat dissipation and complete source of light control of light failure
- Cover: PC material, high transparency, no dazzling, impact resistance, corrosion resistance.